






Hyperlux Eco2 Linear Batten

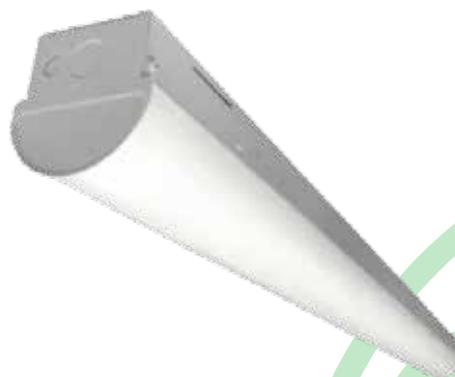

DIMENSIONS

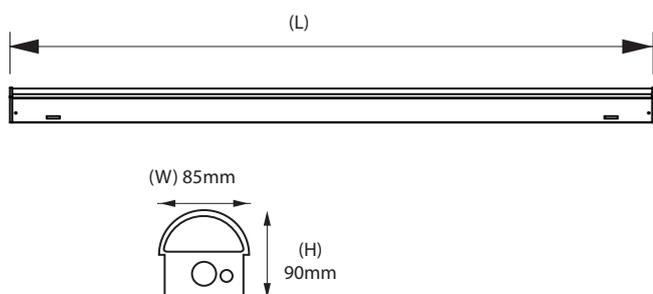

LINE DRAWING



DIMENSION OF FITTING

Product Code	Model Code	Watt W	Lumens	Color Temperature	CRI	L mm
HPE-2-20	HPE20	20W	2600lm	4000K, 5000K	>82	564
HPE-4-40	HPE40	40W	5200lm	4000K, 5000K	>82	1202

ORDERING INFORMATION Lead times will vary based on options selected. Consult with your sales representative.
Example: HPE-20-204

Fixed Code	Type	Size	Wattage	Color Temperature
HP Hyperlux	E Eco	2 2 feet	20W 20W	4 4000K
		4 4 feet	40W 40W	5 5000K

INTENDED USE

Built-in on the compact, Hyperlux Eco2 linear fitting, this solid state strip offers long maintenance and high energy efficiency. It comes with several lumens package selection and color temperature. Idea for new construction or retrofit. Most suitable use in commercial, retail, manufacturing, warehouse and display application.

CONSTRUCTION AND OPTICS

Compact designed linear structure and covered. Housing material using with cold roll mild steel with white powder coated finished and optical cover high efficiency opal diffuser. Colour temperature 4000K and 5000K. Life span 50,000 hours.