





# Recess RDL Apollo Eco



## DIMENSIONS



## LINE DRAWING

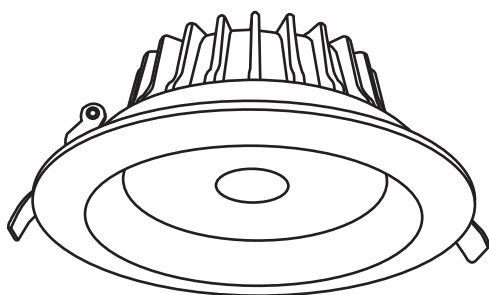

## INTENDED USE

Apollo round recessed LED downlights great for retrofit and new construction applications. Optimal for commercial application such as office, hall, hotel or shopping mall or villa. The LED module maintains at least 90% light output for 30,000 hours.

## CONSTRUCTION AND OPTICS

Round recessed LED downlight with aluminium die casting housing, mirror reflector and clear glass diffuser. It come with high efficient black aluminium die casting heat sink.

The working temperature in  $-20^{\circ}\text{C}$  -  $+35^{\circ}\text{C}$ . The input voltage power of AC220-240V/50-60HZ.

## DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature	H mm	Ø mm	Ø mm	CRI
RRDLAPO-ECO-10	RRDLAPO-ECO-10	10W	850lm	3000K,4000K,6500K	65	145	113	80
RRDLAPO-ECO-15	RRDLAPO-ECO-15	15W	1275lm	3000K,4000K,6500K	80	195	159	80
RRDLAPO-ECO-20	RRDLAPO-ECO-20	20W	1700lm	3000K,4000K,6500K	80	195	159	80
RRDLAPO-ECO-25	RRDLAPO-ECO-25	25W	2125lm	3000K,4000K,6500K	85	230	200	80
RRDLAPO-ECO-30	RRDLAPO-ECO-30	30W	2550lm	3000K,4000K,6500K	85	230	200	80

