



Green Max Eco Recess Mount Downlight




INTENDED USE

The Green Max Eco Recess downlight series can show high brightness, without seeing the lamp itself. Suitable for application such as household, exhibition hall, hotel, shops, jewellery store, hospital and meeting rooms.

CONSTRUCTION AND OPTICS


Using high lumen SMD light source high intensity aluminium shell, heat faste. Using good reflectivity light leading board, it is thinner and brighter, the light is more equally. Low voltage and constant current driver, no glare, the light is soft. Launch in 0.01sec. Energy saving, belongs to grand environmental light.

LINE DRAWING

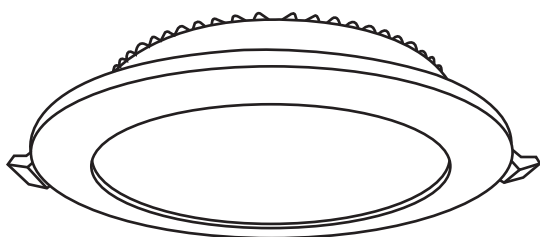


DIMENSION OF FITTING

ROUND

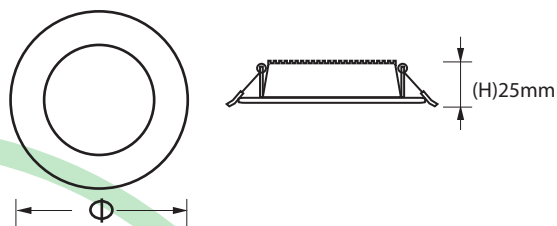

Product Code	Model Code	Wattage	Lumens	Color Temperature	Φ mm	Φ mm
GMECO-RR-05	GMECO-RR-05	5W	450lm	3000K,4000K,6000K	86	75
GMECO-RR-09	GMECO-RR-09	9W	810lm	3000K,4000K,6000K	120	105
GMECO-RR-12	GMECO-RR-12	12W	1080lm	3000K,4000K,6000K	150	135
GMECO-RR-18	GMECO-RR-18	18W	1620lm	3000K,4000K,6000K	170	155
GMECO-RR-24	GMECO-RR-24	24W	2160lm	3000K,4000K,6000K	223	205

SQUARE

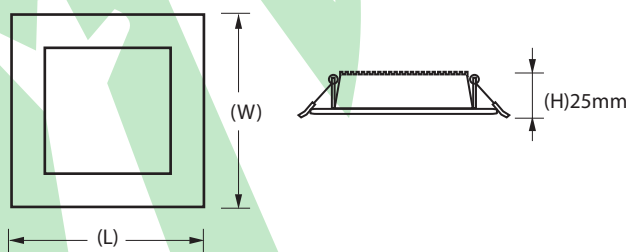

Product Code	Model Code	Wattage	Lumens	Color Temperature	LxW mm	mm
GMECO-RS-05	GMECO-RS-05	5W	450lm	3000K,4000K,6000K	86	75
GMECO-RS-09	GMECO-RS-09	9W	810lm	3000K,4000K,6000K	120	105
GMECO-RS-12	GMECO-RS-12	12W	1080lm	3000K,4000K,6000K	150	135
GMECO-RS-18	GMECO-RS-18	18W	1620lm	3000K,4000K,6000K	170	155
GMECO-RS-24	GMECO-RS-24	24W	2160lm	3000K,4000K,6000K	223	205

ORDERING INFORMATION

Lead times will vary based on options selected. Consult with your sales representative.

Example: GMECO-RR-18-30

Type	Mounting Type	Shape Design	Wattage	Color Temperature
GREEN MAX ECO	R Recess	R Round	05 5w	30 3000K
			09 9w	40 4000K
		S Square	12 12w	60 6000K
			18 18w	
			24 24w	



HBL[®]
HI-BEAM™ Lighting

Specifications and dimension subject to change without notice