




Luxtron SRDL MD001B



Suitable for:



DIMENSIONS



INTENDED USE


Luxtron SRDL MD001B surface mount round downlight is suitable for installation on concrete surface or slab. It is an attractive energy efficient LED solution with minimum maintenance for home and commercial applications. With its long hours lifespan, it is an alternative to the 2x18W and 2x26W PLC Surface downlights respectively. Best used to light task areas in normal height ceilings like living halls, corridors, kitchen and work areas in cost sensitive applications.

Suitable for solar powered DC application with dimming option.

CONSTRUCTION AND OPTICS

Aluminium diecasting housing in glossy white with good light throw while diffused on LED surface reduce glare while it does not cut the true illuminance capability of the LED. Available with Philips LED module with lifecycle lifespan of 30,000 hours.

LINE DRAWING

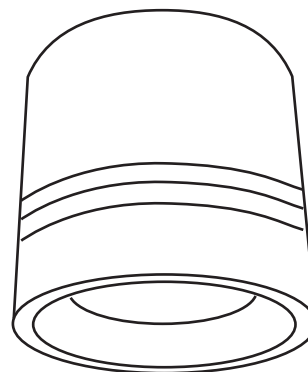

DIMENSION OF FITTING

Model	Wattage	Lumens	Color Temperature
SRDLM001B5F-12W-3	12W	1100lm	3000K
SRDLM001B5F-12W-4	12W	1100lm	4000K
SRDLM001B5F-22W-3	22W	2000lm	3000K
SRDLM001B5F-22W-4	22W	2000lm	4000K

