



SIENA 2 Pro-C

Recess Mount Downlight




INTENDED USE

The SIENA 2 Pro-C Recess downlight series can show high brightness, without seeing the lamp itself. Suitable for application such as household, exhibition hall, hotel, shops, jewellery store, hospital and meeting rooms.

CONSTRUCTION AND OPTICS

Using SMD light source with plastic housing and frosted opal diffuser. The thin profile design suitable for low ceiling clearance. LED lifespan of 25,000 hours. Input Voltage is 170-264VAC, PF >0.9 and CRI >80. Operating frequency is 50/60Hz.

DIMENSIONS

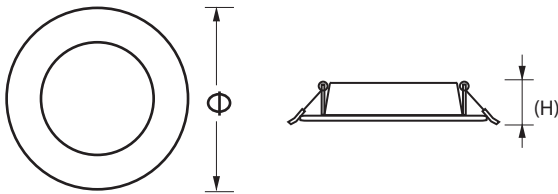

LINE DRAWING



DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature	Φ mm	H mm	⌀ mm
SIENA2PRO-C-RR-12	SIENA2PC-12	12W	1200lm	4000K,6500K	151	32	125
SIENA2PRO-C-RR-18	SIENA2PC-18	18W	1600lm	4000K,6500K	176	32	150
SIENA2PRO-C-RR-24	SIENA2PC-24	24W	2400lm	4000K,6500K	226	32	200

**Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.