





# SIENA Ultra Thin Surface Mount Downlight

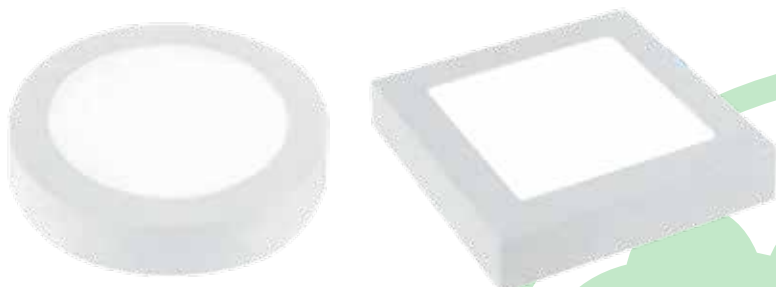


## DIMENSION OF FITTING

### ROUND

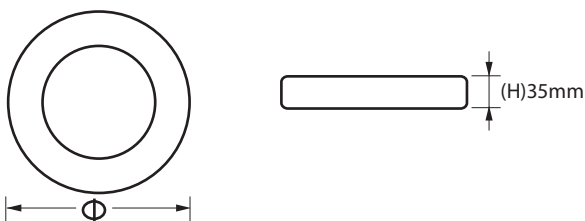

Model	Wattage	Lumens	Color	$\Phi$
SIENA-SMR12D	12W	1020 lm	6500K	170mm
SIENA-SMR12W	12W	1020 lm	3000K	170mm
SIENA-SMR18D	18W	1530 lm	6500K	225mm
SIENA-SMR18W	18W	1530 lm	3000K	225mm

### SQUARE

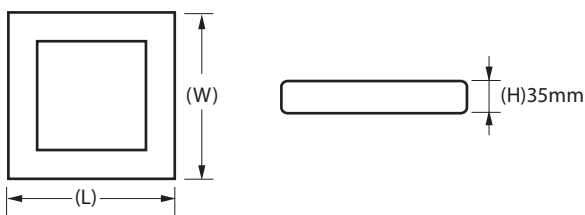


Model	Wattage	Lumens	Color	(L) X (W)
SIENA-SMS12D	12W	1020 lm	6500K	170mm x170mm
SIENA-SMS12W	12W	1020 lm	3000K	170mm x170mm
SIENA-SMS18D	18W	1530 lm	6500K	225mm x225mm
SIENA-SMS18W	18W	1530 lm	3000K	225mm x225mm

## INTENDED USE

## CONSTRUCTION AND OPTICS

Using high lumen SMD light source high intensity aluminium shell, heat faste. Using good reflectivity light leading board, it is thinner and brighter, the light is more equally. Low voltage and constant current driver, no glare, the light is soft. Launch in 0.01sec, no flashing, no noise and no radiation. Energy saving, belongs to grand environmental light.

## LINE DRAWING

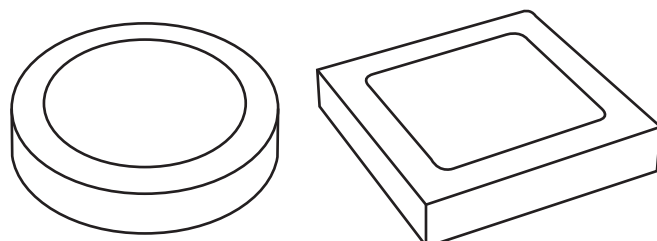

**ORDERING INFORMATION** Lead times will vary based on options selected. Consult with your sales representative.  
Example: SIENA-SMR12W-PH

Type	Mounting Type	Shape Design	Wattage	Color Temperature	Driver
SIENA	-SM Ultra Thin Surface Mount	R Round S Square	12 12w 18 18w	W 3000K (Warm White) D 6500K (Daylight)	-PH Philips

Specifications and dimension subject to change without notice