





Recess RDL STARLUX



DIMENSIONS

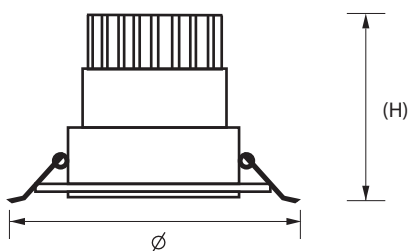

LINE DRAWING

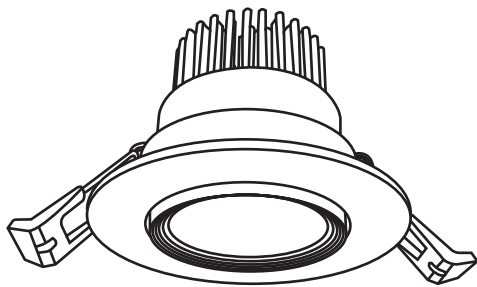

INTENDED USE

Hi-BEAM STARLUX LED round recess downlight. It help reduce glare and deliver excellent led performance for applications such as office, hall, shopping mall, hotel, library or hotel to replace conventional halogen downlight.

CONSTRUCTION AND OPTICS

Diecasting aluminum housing with honeycomb reflector, the housing colour in white. LED luminous efficiency is 80lm/w. LED lifespan of 20,000 hours. Color temperature available in 3000K, 3500K and 4000K.

DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature	Beam Angle	H mm	Ø mm	Ø mm	CRI
STARLUX-5	STARLUX-5	5W	400lm	3000K,3500K,4000K	24°	80	68	55	80
STARLUX-7	STARLUX-7	7W	560lm	3000K,3500K,4000K	24°	80	90	55	80
STARLUX-9	STARLUX-9	9W	720lm	3000K,3500K,4000K	24°	85	90	70	80
STARLUX-15	STARLUX-15	15W	1200lm	3000K,3500K,4000K	24°	82	137	115	80
STARLUX-20	STARLUX-20	20W	1600lm	3000K,3500K,4000K	24°	112	137	115	80
STARLUX-25	STARLUX-25	25W	2000lm	3000K,3500K,4000K	24°	120	158	135	80
STARLUX-30	STARLUX-30	30W	2400lm	3000K,3500K,4000K	24°	120	158	135	80

