




# Jupiter Floodlight (Gen4)



## LINE DRAWING

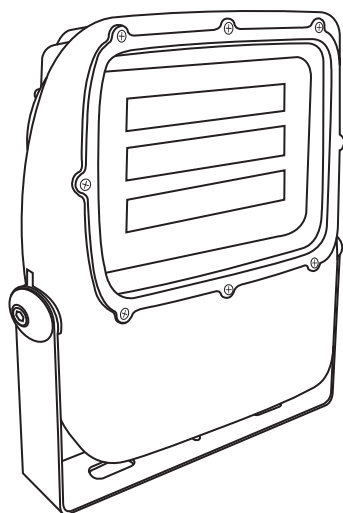

## INTENDED USE

The sleek and compact design of the Jupiter Floodlights is made possible with the embedment of high performance LED technology. They are ideal for landscape, signage, facade, industrial and general area lighting in many commercial and residential applications.

## CONSTRUCTION AND OPTICS

IP66 die cast aluminium finished with durable polyester epoxy power coating that provides superior resistance to corrosion and weathering. Fixed with anti glare tempered glass with high light transmission capability. Lifespan of 50,000 hours.

Slim Design



Powered by:

**PHILIPS**




Specifications and dimension subject to change without notice




**HBL**<sup>®</sup>  
HI-BEAM™ Lighting

## DIMENSIONS (mm)

### JUPB

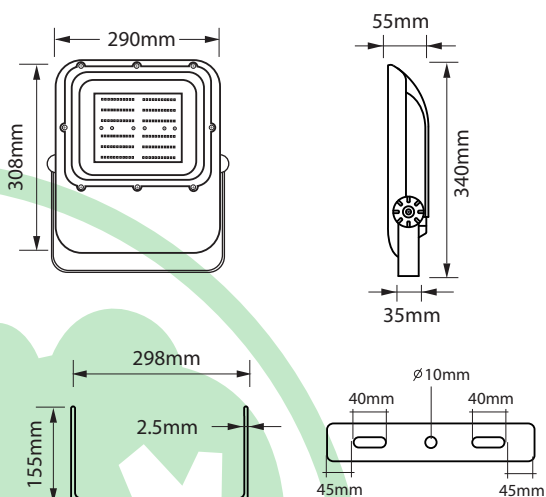

### JUPC

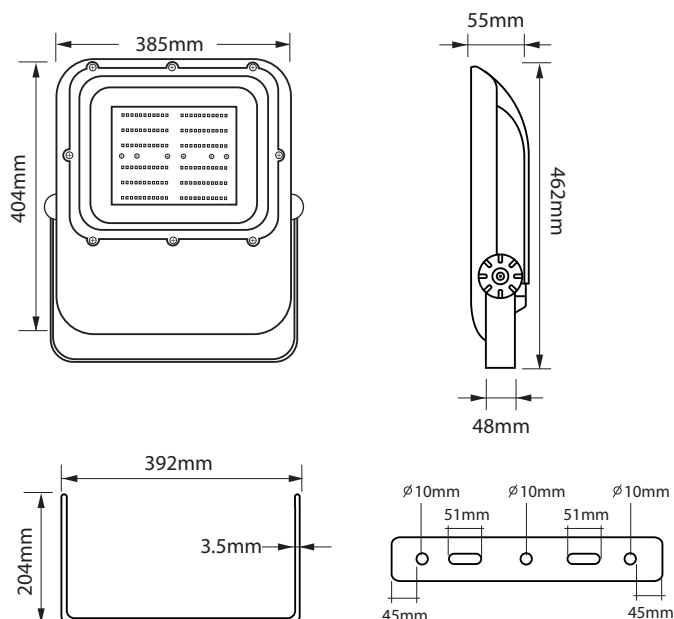

## PRODUCT SPECIFICATION

### Eco Green (120lm/w)

| Product Code | Model Code | Wattage | Lumens  | Color Temperature   | CRI | Weight kg | Replacement  |
|--------------|------------|---------|---------|---------------------|-----|-----------|--------------|
| JUPB6805076  | JUP050     | 53W     | 6224lm  | 3000K, 4000K, 5700K | 70  | 4         | 70W-150W HID |
| JUPB6812076  | JUP115     | 105W    | 12448lm | 3000K, 4000K, 5700K | 70  | 4         | 250W HID     |
| JUPB6815076  | JUP150     | 156W    | 18672lm | 3000K, 4000K, 5700K | 70  | 4         | 400W HID     |
| JUPC6820076  | JUP200     | 210W    | 24896lm | 3000K, 4000K, 5700K | 70  | 8         | 400W HID     |
| JUPC6825076  | JUP250     | 260W    | 31120lm | 3000K, 4000K, 5700K | 70  | 8         | 400W HID     |


\*\*Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.

### Performance (146lm/w)

| Product Code | Model Code | Wattage | Lumens  | Color Temperature   | CRI | Weight kg | Replacement  |
|--------------|------------|---------|---------|---------------------|-----|-----------|--------------|
| JUPB4805076  | JUP050     | 55W     | 8030lm  | 3000K, 4000K, 5700K | 70  | 4         | 70W-150W HID |
| JUPB4811576  | JUP115     | 113W    | 16498lm | 3000K, 4000K, 5700K | 70  | 4         | 250W HID     |
| JUPB4815076  | JUP150     | 150W    | 21900lm | 3000K, 4000K, 5700K | 70  | 4         | 400W HID     |
| JUPC4820076  | JUP200     | 200W    | 29346lm | 3000K, 4000K, 5700K | 70  | 8         | 400W HID     |

\*\*Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.

Photometric :

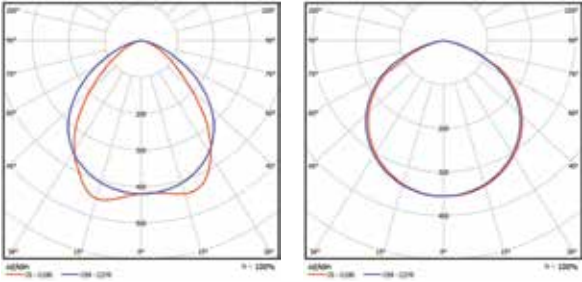

**ORDERING INFORMATION** Lead times will vary based on options selected. Consult with your sales representative. Example: JUPB4805076BB

| Type             | Fitting Size                          | Board                            | Beam                      | Wattage  | CRI          | CCTK                          | Driver                          | Special Instruction       | Housing Color |
|------------------|---------------------------------------|----------------------------------|---------------------------|--|--------------|-------------------------------|---------------------------------|---------------------------|---------------|
| Jupiter<br>(JUP) | A Small<br>B 340mm (M)<br>C 462mm (L) | 6 120lm module<br>4 146lm module | 8 120'<br>Q 90'<br>O Oval | <u>Eco Green</u><br>050 53w<br>120 105w<br>150 156w<br>200 210w<br>250 260w<br><u>Performance</u><br>050 55w<br>115 113w<br>150 150w<br>200 200w | 7 70<br>8 80 | 3 3000K<br>4 4000K<br>6 5700K | A 1x65w<br>C 1x150w<br>D 1x250w | SP Surge Protector Device | B Black       |

Powered by:

PHILIPS



Specifications and dimension subject to change without notice



HBL<sup>®</sup>  
HI-BEAM™ Lighting