


# LUNAR 3 Floodlight



## LINE DRAWING

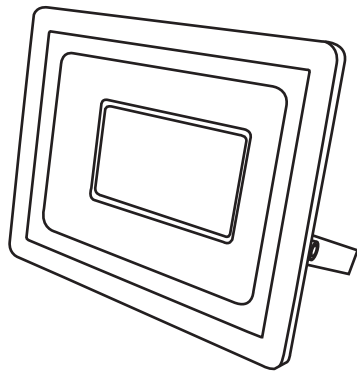


## INTENDED USE

The Lunar 3 Floodlight is made possible with the embedment of high performance LED technology with 30,000hrs life span. LED Floodlight deliver excellent led performance for wide different general applications such as general floodlight, building facade, cold room, passage ways, signage or industrial usage

## CONSTRUCTION AND OPTICS

Lunar 3 come with IP66 die cast aluminium finished with outdoor epoxy powder coating that provides resistance to corrosion and weather. Cover with sand blast texture tempered glass.

## DIMENSIONS (mm)

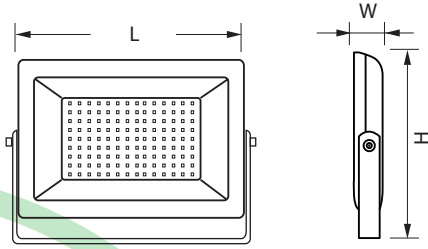

## PRODUCT SPECIFICATION

Product Code	Model Code	Wattage	Lumens	Color Temperature	CRI	L mm	W mm	H mm
LU3FLD0108600000	LU3010	10W	1000lm	3000K, 4000K, 6000K	80	103	24	83
LU3FLD0208600000	LU3020	20W	2000lm	3000K, 4000K, 6000K	80	121	27	95.5
LU3FLD0308600000	LU3030	30W	3000lm	3000K, 4000K, 6000K	80	160	31	122
LU3FLD0508600000	LU3050	50W	5000lm	3000K, 4000K, 6000K	80	206	31	160
LU3FLD1008600000	LU3100	100W	10000lm	3000K, 4000K, 6000K	80	270	32	210
LU3FLD1508600000	LU3150	150W	15000lm	3000K, 4000K, 6000K	80	330	32	250
LU3FLD2008600000	LU3200	200W	20000lm	3000K, 4000K, 6000K	80	370	32	270

**ORDERING INFORMATION** Lead times will vary based on options selected. Consult with your sales representative. Example: LU3FLD0308300000

Type	Wattage	CRI	CCTK	Engineering Reserve
Lunar 3 Floodlight (LU3FLD)	010 10w	8 80	30 3000K	0000
	020 20w		40 4000K	
	030 30w		60 6000K	
	050 50w			
	100 100w			
	150 150w			
	200 200w			