





Amenities Lantern GAD 1044



DIMENSIONS

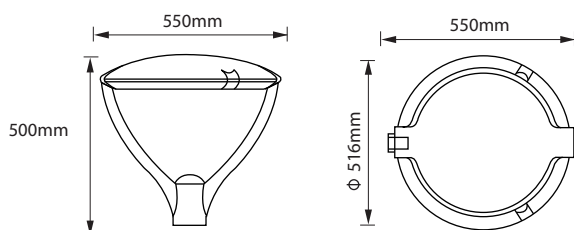

LINE DRAWING



INTENDED USE

Decorative LED luminaire for post-top mounting with innovative lighting technology by secondary, glare free reflector system. Available with symmetrical or asymmetrical reflectors. Light source by IP 65 projector with powder coated die-cast aluminium housing. With LED engines of 55 W and 75 W, and luminous flux between 5660 lm and 7670 lm. Operation by constant current drivers in IP 67 protection class. Suitable for glare-free illumination of shopping streets, pedestrian precincts, parks and other landscapes. Ideal for the refurbishment of old luminaires due to compatible 76 mm spigot diameter. Recommended mounting height 4-6 meters.

CONSTRUCTION AND OPTICS

Housing cover formed of aluminium sheet, support brackets and projector made of die-cast aluminium. Removable built in driver (IP 67), replaceable LED head. All screws made of stainless steel. Specified driver and LED lifetime guaranteed by thermal separation between the driver compartment and the LED compartment.

SPECIFICATION OF LUMINAIRE

Product Code	Model Code	Wattage	Lumens	Color Temperature
GAD1044-035-30	GAD1044-035	35W	3500lm	3000K
GAD1044-070-30	GAD1044-070	70W	7500lm	3000K
GAD1044-120-30	GAD1044-120	120W	12000lm	3000K