





# GADLN

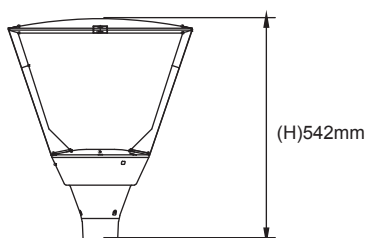


## DIMENSIONS

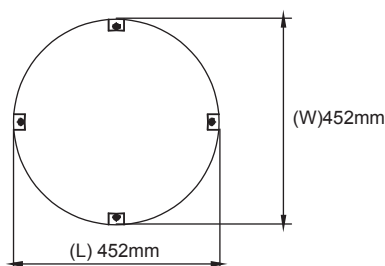

## SPECIFICATION OF LUMINAIRE

Product Code	Model Code	Wattage	Lumens	CRI	Weight kg
GADLN030	GADLN030	30W	4200lm	>70	7.0
GADLN040	GADLN040	40W	5600lm	>70	7.0
GADLN060	GADLN060	60W	8400lm	>70	7.0
GADLN090	GADLN090	90W	12600lm	>70	7.2

## LINE DRAWING

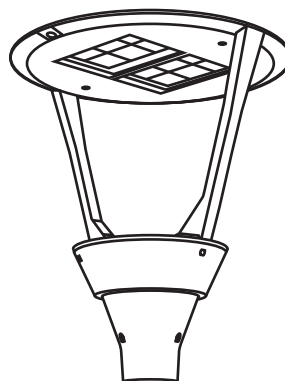

## INTENDED USE

GADLN garden light is high efficacy of 140lm/W on luminaire level. PMMA offers resistance to UV and visible radiations. In comparison with PC lens. Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. Class II is sometimes known as “double insulated”. This is an IEC protection class and refers to the power supply’s internal construction and electrical insulation. Ideal for compound, parking areas, street lighting, walkways and car lots.

## CONSTRUCTION AND OPTICS

High strength die-casting aluminum and anti-aging electrostatic spray processing are used for housing, our garden light can be used for salty and humidity environment. With IK08 protected tempered glass, our garden light has better performance for outdoor usage, and 50,000 hours long life span.



Specifications and dimension subject to change without notice