




Luxtron High Bay VECO UFO




LED

IP
65

DIMENSIONS



LINE DRAWING

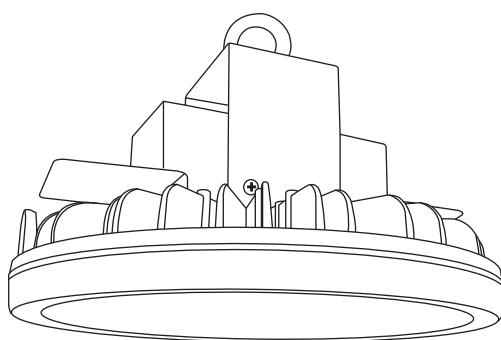

INTENDED USE

Economical LED replacement for traditional or conventional low bay or high bay system such as HID and T8/T5 fluorescent. Application include manufacturing, warehousing, commercial, retail, and other large indoor spaces. Generates high efficacy of lumens/watt output giving you an incredible dollar/lumens in your investment with shortest ROI without sacrificing the performance. Lifespan of 50,000 hours.

CONSTRUCTION AND OPTICS

It ease the installation by securing the luminaire by the suspended mount eye bolt then to hook to the c-channel using chain, or bracket. Diecasting aluminium housing allow superior thermal management to reduce LED and driver temperature providing years of trouble-free operation. Different beam distributions available in narrow, focus, wide and asymmetric spread to meet horizontal and vertical light level requirements.

Powered by:

PHILIPS



Specifications and dimension subject to change without notice



HBL®

HI-BEAM™ Lighting

SPECIFICATION OF LUMINAIRE

Performance 140lm/w

Product Code	Model Code	Watt W	Lumens	Color Temperature	Φ mm	H mm	Weight kg
HBVU2200CN2Q76	HBVU2200	201W	28140lm	4000K, 5700K	350	170	6.0
HBVU2250CN2Q76	HBVU2250	251W	35140lm	4000K, 5700K	350	170	6.0
HBVU2300DN2Q76	HBVU2300	300W	42000lm	4000K, 5700K	450	200	10.3
HBVU2350DN2Q76	HBVU2350	350W	49000lm	4000K, 5700K	450	200	10.3

**Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.

ORDERING INFORMATION

Lead times will vary based on options selected. Consult with your sales representative.

Example: HBVU2350DN2Q76

Type	Wattage	Fitting Size	Mounting	LED Board	Beam	CRI	CCTK
HB VECO UFO (HBVU)	Performance 2200 201w 2250 251w 2300 300w 2350 350w	C- 350mm(L) D- 450mm(XL)	N Eye Bolt B Bracket	2 140lm module	Q 90° Blank No Lens	7 70	4 4000K 6 5700K