




# Duro LED



## DIMENSIONS

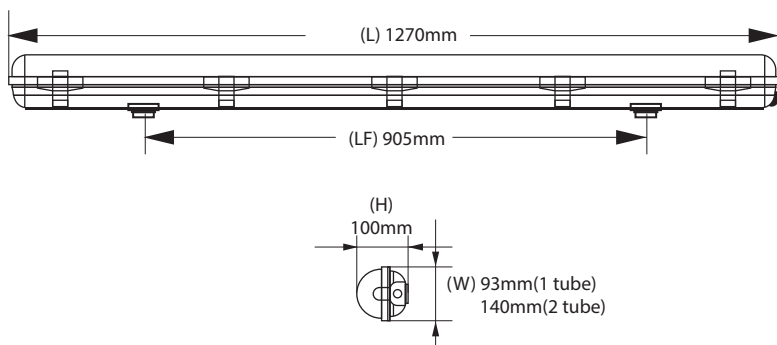

## DIMENSION OF FITTING

Model	Watt W	Lumens	Color Temperature	CRI	Life Span
DULL14-40W-6	40W	3286lm	4000K,5000K,5700K	80	30,000hrs
DULP14-35W-6	35W	3770lm	4000K,5000K,5700K	80	50,000hrs
DULP14-55W-6	55W	5590lm	4000K,5000K,5700K	80	50,000hrs
DULP14-75W-6	75W	6765lm	4000K,5000K,5700K	80	50,000hrs

**ORDERING INFORMATION** Lead times will vary based on options selected. Consult with your sales representative.  
Example: DULL14-40W-6

Fixed Code	Type	Board	Size	Wattage	Color Temperature
DUL Duro LED	L Lite	1 Gen 1	2 2 feet	40W 40W	4 4000K
	P Performance		4 4 feet	35W 35W	5 5000K
	M Premium			55W 55W	6 5700K
				75W 75W	


## INTENDED USE

Duro LED weatherproof is a high quality luminaire with a high system efficacy that delivers significant energy savings of up to 50% as compared to conventional T8 battens. With a reliable and robust housing structure, this maximizes the endurance and contributes to its long lifetime. Suitable to use in Industry such as automotive assembly line, food and beverage general areas, corridors / walkways, indoor car parks.

## CONSTRUCTION AND OPTICS

IP66. For use where moisture or dust is prevalent. Designed with shallow and compact housing for ease of installation. The polycarbonate body and frosted polycarbonate diffuser for maximum durability. All fixing clips are stainless steel as standard. With LED system efficacy of more than 90lm/w with lifetime of up to 50,000 hours for Pro range and up to 25,000 hours for Eco range with 70% lumen maintained. Available in dimming option of 1-10v or DALI control.

## LINE DRAWING

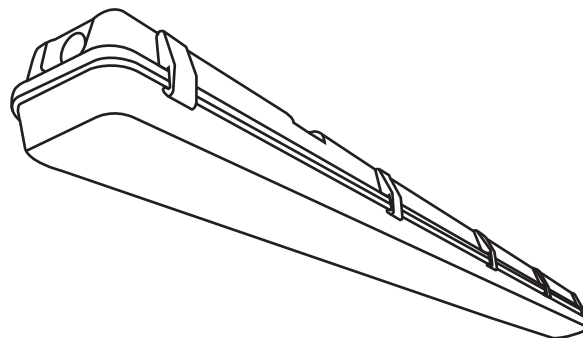

Stainless Steel Clips



Specifications and dimension subject to change without notice