




QuinCESS Ultra Slim




DIMENSIONS


(Surface)

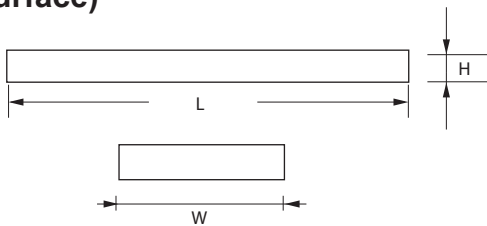

(Wood Ceiling)

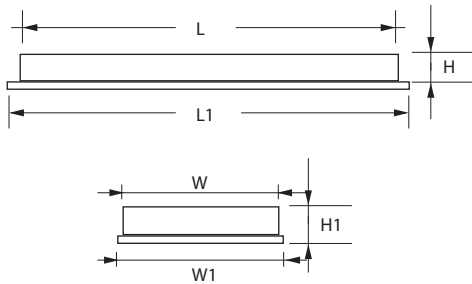

LINE DRAWING

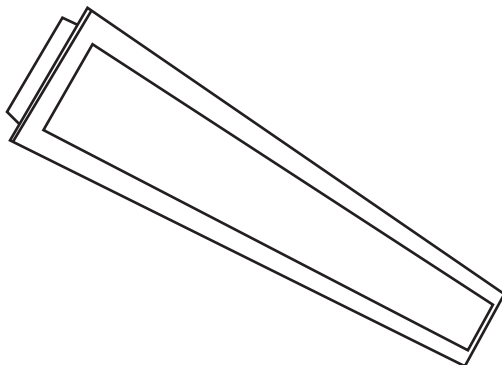

INTENDED USE

Surface mount box fitting with diffuser. Best used to light task area in normal height ceiling like walk way, corridors where no suspended ceiling is available, thus mounting is required on concrete surface or slab.

CONSTRUCTION AND OPTICS

Familiar industrial most widely used design for ease of installation by mounting to surface of concrete or slab. Come with latch system hinged diffuser frame enabling diffuser frame to hinge down and swing. Housing formed of high quality gauge sheet steel. Going through five-stage-iron-phosphate pre-treatment ensures superior paint adhesion and rust resistance. Housing painted after fabrication with environmentally friendly, high-gloss, very high reflectivity epoxy powder-coat. Option to have high reflectivity mirror reflector achieved with anodized aluminium efficiently directs light downward. Available with clear or opal acrylic diffuser or prismatic diffuser to provide even light distribution glare control and maximum light transmission, combined with a very low luminosity at angle approaching the horizontal surface. It is designed to minimize glare and maximize light output and visual comfort together with a good degree of protection.



DIMENSION OF FITTING

Surface (1 TUBE)

Product Code	Model Code	L mm	W mm	H mm
QUSPUS10SHP120	QUSPUS120	612	138	50
QUSPUS10SHO120	QUSPUS120	612	138	50
QUSPUS10SHL120	QUSPUS120	612	138	50
QUSPUS10SHR120	QUSPUS120	612	138	50
QUSPUS22SHP140	QUSPUS140	1222	138	50
QUSPUS22SHO140	QUSPUS140	1222	138	50
QUSPUS22SHL140	QUSPUS140	1222	138	50
QUSPUS22SHR140	QUSPUS140	1222	138	50

* refer to T8LED tube catalogue for wattage & lumens

Wood Ceiling (1 TUBE)

Product Code	Model Code	L mm	L1 mm	W mm	W1 mm	H mm	H1 mm
QUSPUS10MHP120	QUSPUS120	615	635	111	140	80	85
QUSPUS10MHL120	QUSPUS120	615	635	111	140	80	85
QUSPUS10MHO120	QUSPUS120	615	635	111	140	80	85
QUSPUS10MHR120	QUSPUS120	615	635	111	140	80	85
QUSPUS22MHP140	QUSPUS140	1222	1245	111	140	80	85
QUSPUS22MHO140	QUSPUS140	1222	1245	111	140	80	85
QUSPUS22MHL140	QUSPUS140	1222	1245	111	140	80	85
QUSPUS22MHR140	QUSPUS140	1222	1245	111	140	80	85

* refer to T8LED tube catalogue for wattage & lumens

Surface (2 TUBE)

Product Code	Model Code	L mm	W mm	H mm
QUSPUS10SHP220	QUSPUS220	612	138	50
QUSPUS10SHO220	QUSPUS220	612	138	50
QUSPUS10SHL220	QUSPUS220	612	138	50
QUSPUS10SHR220	QUSPUS220	612	138	50
QUSPUS22SHP240	QUSPUS240	1222	138	50
QUSPUS22SHO240	QUSPUS240	1222	138	50
QUSPUS22SHL240	QUSPUS240	1222	138	50
QUSPUS22SHR240	QUSPUS240	1222	138	50

* refer to T8LED tube catalogue for wattage & lumens

Wood Ceiling (2 TUBE)

Product Code	Model Code	L mm	L1 mm	W mm	W1 mm	H mm	H1 mm
QUSPUS10MHP220	QUSPUS220	615	635	111	140	80	85
QUSPUS10MHO220	QUSPUS220	615	635	111	140	80	85
QUSPUS10MHL220	QUSPUS220	615	635	111	140	80	85
QUSPUS10MHR220	QUSPUS220	615	635	111	140	80	85
QUSPUS22MHP240	QUSPUS240	1222	1245	111	140	80	85
QUSPUS22MHO240	QUSPUS240	1222	1245	111	140	80	85
QUSPUS22MHL240	QUSPUS240	1222	1245	111	140	80	85
QUSPUS22MHR240	QUSPUS240	1222	1245	111	140	80	85

* refer to T8LED tube catalogue for wattage & lumens

ORDERING INFORMATION

Lead times will vary based on options selected. Consult with your sales representative.

Example: QUSPUS10SHP220

Type	Louver	Installation Type	Diffuser Mechanical	Diffuser Mechanical	Tubes
QuinCESS Ultra Slim (QUSPUS)	10 10 Louver	S Surface	H Hinged Door	P Prismatic	1 1 Tubes
	22 22 Louver	M MM/WC		O Opal L Shower/Lattice R Raindrop	2 2 Tubes



HBL[®]
HI-BEAM™ Lighting

Specifications and dimension subject to change without notice