





StyleGlo



DIMENSIONS




INTENDED USE

Hi-BEAM StyleGlo LED recess mounted modulus LED troffer with mirror louvre and micro diffuser. It delivers excellent led performance with low glare ratio ($UGR < 17$) for wide different applications such as office, hall, classroom, library or hostel to replace conventional T5 or T8 fluorescent or LED Tube.

CONSTRUCTION AND OPTICS

Housing formed of cold roll steel nished with epoxy powder coating, white colour housing. Mirror louvre with micro di user. Colour temperature available in 2700K, 3000K, 4000K, 5000K and 6500K. Designed to provide 50,000 hours lifespan.

LINE DRAWING

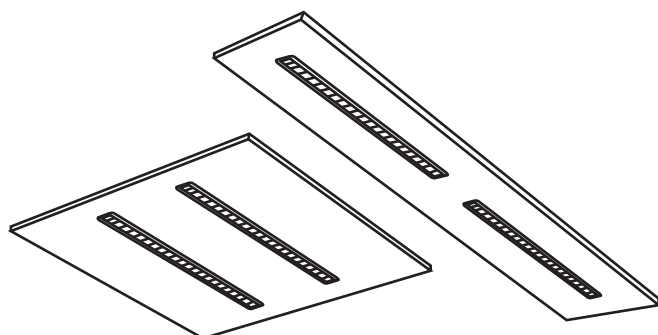

PHILIPS

Specifications and dimension subject to change without notice



HBL[®]
HI-BEAM™ Lighting

DIMENSION OF FITTING

Metric

Product Code	Model Code	Wattage	Lumens	Size(mm) W x L	Color Temperature
SGMS2R1PN30	SG30	29W	3400lm	297.5x595	2700K,3000K,4000K,5000K,6500K
SGMN2R2PN30	SG30	29W	3400lm	595x595	2700K,3000K,4000K,5000K,6500K
SGMS4R2PN30	SG30	29W	3400lm	297.5x1195	2700K,3000K,4000K,5000K,6500K
SGMN4R4PN30	SG30	29W	3400lm	595x1195	2700K,3000K,4000K,5000K,6500K
SGMN4R4PN60	SG60	60W	6800lm	595x1195	2700K,3000K,4000K,5000K,6500K

Imperial

Product Code	Model Code	Wattage	Lumens	Size(mm) W x L	Color Temperature
SGIS2R1PN30	SG30	29W	3400lm	302.5x605	2700K,3000K,4000K,5000K,6500K
SGIN2R2PN30	SG30	29W	3400lm	605x605	2700K,3000K,4000K,5000K,6500K
SGIS4R2PN30	SG30	29W	3400lm	302.5x1210	2700K,3000K,4000K,5000K,6500K
SGIN4R4PN30	SG30	29W	3400lm	605x1210	2700K,3000K,4000K,5000K,6500K
SGIN4R4PN60	SG60	60W	6800lm	605x1210	2700K,3000K,4000K,5000K,6500K

ORDERING INFORMATION Lead times will vary based on options selected. Consult with your sales representative. Example: SGMS2R2PN30-865

Code	Type / Size	Mounting	Rows of Panel Module	Dimming	Wattage	CRI	CCTK
StyleGlo SG	<u>Metric</u>	R Recessed	1P Pro Panel Module 2P Pro Panel Module 4P Pro Panel Module	N No dimming	30 29w 60 60w	-8 80	27 2700K 30 3000K 40 4000K 50 5000K 65 6500K
	MS2 Slim (1x2) 297.5mm x 595mm						
	MN2 Normal (2x2) 595mm x 595mm						
	MS4 Slim (1x4) 297.5mm x 1195mm						
	MN4 Normal (2x4) 595mm x 1195mm						
	<u>Imperial</u>						
	IS2 Slim (1x2) 302.5mm x 605mm						
	IN2 Normal (2x2) 605mm x 605mm						
	IS4 Slim (1x4) 302.5mm x 1210mm						
	IN4 Normal (2x4) 605mm x 1210mm						