





RT5



DIMENSIONS

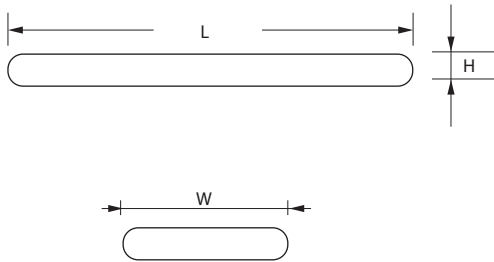

LINE DRAWING

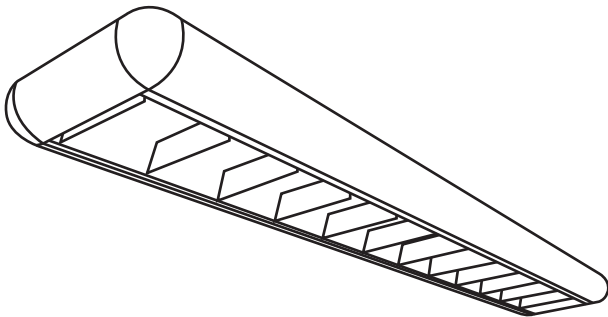

INTENDED USE

Surface T5 lamps and plaster louver fitting. Best used to light task areas in normal height ceilings like general industries, offices, conferences room, general open plan office, data processing office, reception and public services area.

CONSTRUCTION AND OPTICS

Housing formed of high quality guage sheet steel. Going through five-stage iron-phosphate resistance. Housing painted after fabrication with environmental friendly, high gloss, very high reflectivity epoxy powder-coat. High reflectivity mirror reflector achieved with anodized aluminium efficiently directs light downward while those cross blade louvers which are held in place with interlocking feature maximizes shielding to soften light distribution to deliver a balance amount of light to both vertical and horizontal surfaces.

DIMENSION OF FITTING

(1 TUBE)

Product Code	Model Code	Watt W	L mm	W mm	H mm
RT5SS2FM5114	RT5114	1X14W	632	200	65
RT5SS2M5114	RT5114	1X14W	632	200	65
RT5SS4FM5128	RT5128	1X28W	1242	200	65
RT5SS4M5128	RT5128	1X28W	1242	200	65
RT5SS4FM5154	RT5154	1X54W	1242	200	65
RT5SS4M5154	RT5154	1X54W	1242	200	65

(2 TUBE)

Product Code	Model Code	Watt W	L mm	W mm	H mm
RT5SS2FM5214	RT5214	2X14W	632	300	65
RT5SS2M5214	RT5214	2X14W	632	300	65
RT5SS4FM5228	RT5228	2X28W	1242	300	65
RT5SS4M5228	RT5228	2X28W	1242	300	65
RT5SS4FM5254	RT5254	2X54W	1242	300	65
RT5SS4M5254	RT5254	2X54W	1242	300	65

ORDERING INFORMATION

Lead times will vary based on options selected. Consult with your sales representative.
Example: RT5SS4FM5128

Type	Installation Type	Design	Reflector	System
RADIUS MIRROR FTG (RT5)	S Surface	S1 Slim (1' x 1')	FM Full Mirror	5 T5
		S2 Slim (1' x 2')	M Mirror Reflector	8 T8
		S4 Slim (1' x 4')		