




Luxtron STLA006

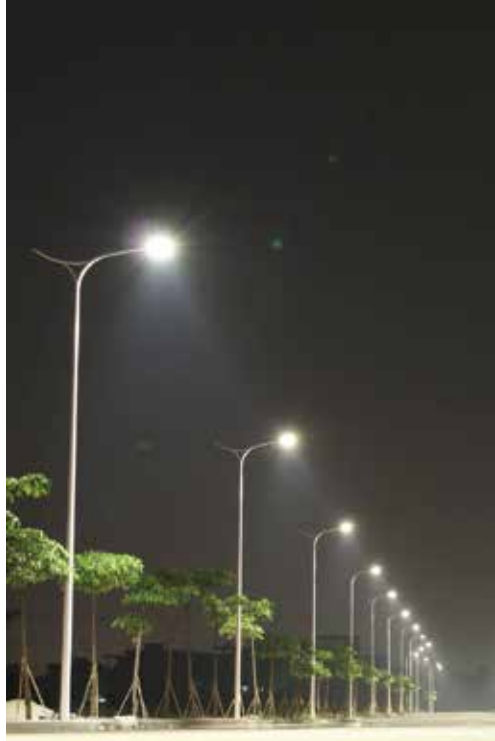


INTENDED USE

High efficacy street lighting using for outdoor use. Ideal for compound, parking areas, street lighting or walkways. It designed to meet various road standards up to ME1.


CONSTRUCTION AND OPTICS

Heavy-duty cast aluminum housing with powder coat paint for superior protection against fade and wear. LED drivers hard mounted to die-cast aluminum back casting for optimal heat sinking and operation efficiency. Voltage supply is 220VAC ~ 240VAC , 50/60Hz. Good thermal management incorporates both conduction and natural convection to transfer heat rapidly away from the LED source and retain optimal efficacy and light output. Designed to provide minimum 50,000 hours lifespan. Easy maintenance tool-less opening of gear compartment.

LINE DRAWING

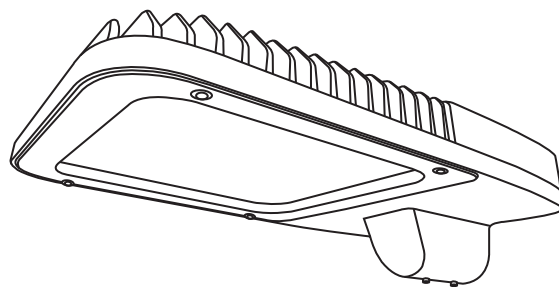

DIMENSIONS

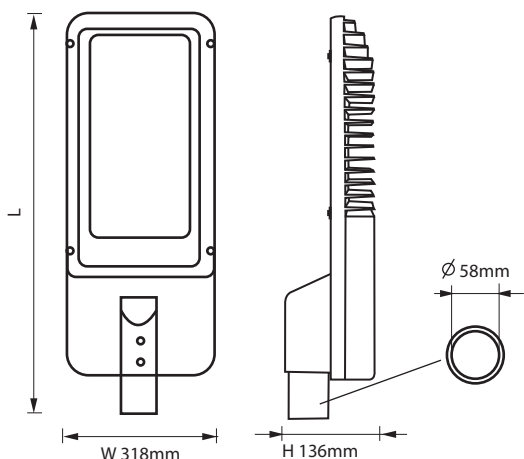

Tool Free Driver Box



Specifications and dimension subject to change without notice

DIMENSION OF FITTING AND CARTON

140lm/w

Product Code	Model Code	Wattage	Lumens	Color Temperature	L mm	Length per/ctn mm	Width per/ctn mm	Height per/ctn mm	Weight kg	Est Qty 20ft Std	Est Qty 40ft HC
STLA006050B11D-730	STLA006-050B	50W	6916lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006070B11D-730	STLA006-070B	70W	10075lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006100B11D-730	STLA006-100B	100W	14191lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006120B11D-730	STLA006-120B	120W	17244lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006150B11D-730	STLA006-150B	150W	20659lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006180B11D-730	STLA006-180B	180W	26501lm	3000K, 4000K	650	670	375	200	11.5	479	1162
STLA006200B11D-730	STLA006-200B	200W	29221lm	3000K, 4000K	650	670	375	200	11.5	479	1162
STLA006240B11D-730	STLA006-240B	240W	36483lm	3000K, 4000K	850	910	375	200	14.0	350	995

150lm/w

Product Code	Model Code	Wattage	Lumens	Color Temperature	L mm	Length per/ctn mm	Width per/ctn mm	Height per/ctn mm	Weight kg	Est Qty 20ft Std	Est Qty 40ft HC
STLA006035A11D-730	STLA006-035A	35W	4927lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006050A11D-730	STLA006-050A	50W	7531lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006070A11D-730	STLA006-070A	70W	10510lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006100A11D-730	STLA006-100A	100W	14948lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006120A11D-730	STLA006-120A	120W	18323lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006150A11D-730	STLA006-150A	150W	21308lm	3000K, 4000K	422	520	375	200	6.0	575	1397
STLA006180A11D-730	STLA006-180A	180W	27501lm	3000K, 4000K	650	670	375	200	11.5	479	1162



HBL[®]
HI-BEAM™ Lighting



BUATAN MALAYSIA

Specifications and dimension subject to change without notice