





DUROLED Y17



DIMENSIONS

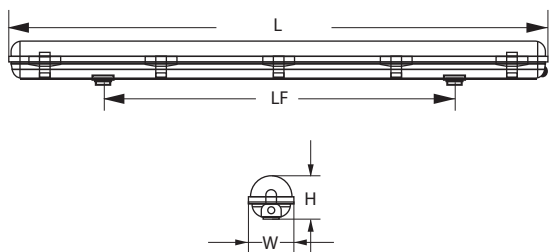

LINE DRAWING

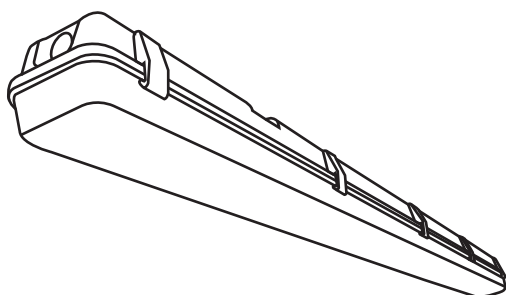

INTENDED USE

DUROLED Y17 is dust-proof and waterproof. High lighting effect, giving out even and soft light. Ideal for moisture, wet and dusty environment, high pressure resistance, suitable for parking place, tunnel, corridor, gallery, railway / bus / MTR Station etc.

CONSTRUCTION AND OPTICS

IP66. For use where moisture or dust is prevalent. Polycarbonate housing and diffuser with stainless steel clips with osram led driver and lumileds led. IK08

DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	L mm	W mm	H mm
DUROLEDY17-20W	DUROLEDY17-20W	20W	2600lm	607	71	78
DUROLEDY17-28W	DUROLEDY17-28W	28W	4340lm	607	71	78
DUROLEDY17-50W	DUROLEDY17-50W	50W	6500lm	1207	71	74





DuroLED Y17

LED 20W

Hi-BEAM DuroLED Y17 20W IP66 Batten delivers excellent led performance for wide different applications such as cold storage, food production area, walkways or indoor carpark




Product data

General Information

Product family code	DUROLEDY17-20W
Housing Material	Polycarbonate Housing and Polycarbonate diffuser with stainless steel clips
Housing Color	Grey
LED Light Source	Epistar
Color Temperature	4000K/ 6500K
CRI	80
LED Life Span	50,000hrs
MacAdams	5
Ingress Protection	IP66
Mech. Impact Protect	IK08
Operating Temperature	-5C TO +50C
Power Factor	>0.95
Nominal Voltage	210VAC-280VAC 50/60 Hz
Initial Input Power	20W
Total Luminous Flux	2,600lm

Dimension

Dimension	607 x 71 x (H)78mm (2 feet)
Weight	1.20 kg+-

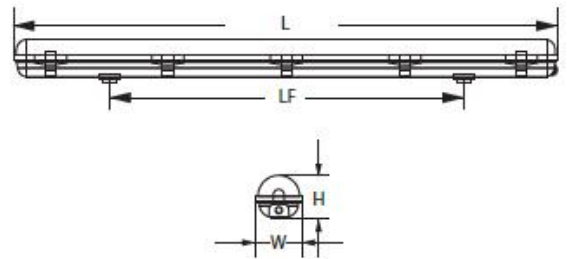

Note: Specification are subject to change without prior notice



HI-BEAM™ Lighting





DuroLED Y17

LED 28W

Hi-BEAM DuroLED Y17 28W IP66 Batten delivers excellent led performance for wide different applications such as cold storage, food production area, walkways or indoor carpark



Product data


General Information

Product family code	DUROLEDY17-28W
Housing Material	Polycarbonate Housing and Polycarbonate diffuser with stainless steel clips
Housing Color	Grey
LED Light Source	Epistar
Color Temperature	4000K/ 6500K
CRI	80
LED Life Span	50,000hrs
MacAdams	5
Ingress Protection	IP66
Mech. Impact Protect	IK08
Operating Temperature	-5C TO +50C
Power Factor	>0.95

Nominal Voltage	210VAC-280VAC 50/60 Hz
Initial Input Power	28W
Total Luminous Flux	4,340lm

Dimension

Dimension	607 x 71 x (H)78mm (2 feet)
Weight	1.20 kg+-

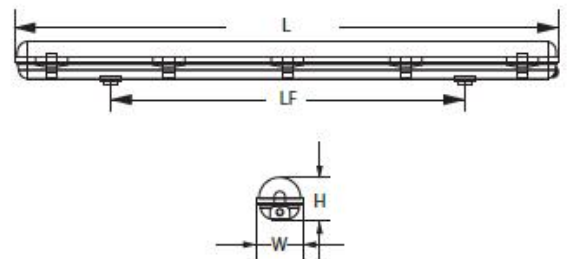

Note: Specification are subject to change without prior notice



HI-BEAM™ Lighting



DuroLED Y17

LED 50W



Hi-BEAM DuroLED Y17 50W IP66 Batten delivers excellent led performance for wide different applications such as cold storage, food production area, walkways or indoor carpark



Product data


General Information

Product family code	DUROLEDY17-50W
Housing Material	Polycarbonate Housing and Polycarbonate diffuser with stainless steel clips
Housing Color	Grey
LED Light Source	Epistar
Color Temperature	4000K/ 6500K
CRI	80
LED Life Span	50,000hrs
MacAdams	5
Ingress Protection	IP66
Mech. Impact Protect	IK08
Operating Temperature	-5C TO +50C
Power Factor	>0.95

Nominal Voltage	210VAC-280VAC 50/60 Hz
Initial Input Power	50W
Total Luminous Flux	6,500lm

Dimension

Dimension	1207 x 71 x (H)74mm (4 feet)
Weight	1.60 kg+

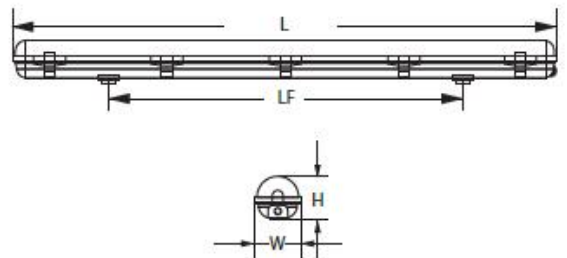

Note: Specification are subject to change without prior notice



HI-BEAM™ Lighting

