




# LED Globe Wall Light FG001



## DIMENSIONS

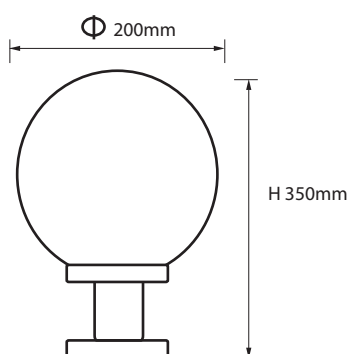


## INTENDED USE

Hi-BEAM FG001 LED wall light deliver excellent led performance for applications such as building facade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions.

## CONSTRUCTION AND OPTICS

LED lifespan of 20,000 hours. Input voltage is AC220-240VAC, 50/60Hz and IK08.

## LINE DRAWING



## DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature
FG001-10	FG001	10W	850lm	4000K



## LED GLOBE WALL MOUNTED LIGHT - (10W)

Hi-BEAM FG001 LED wall light deliver excellent led performance for applications such as building facade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions.



### Product data

#### General Information

Product family code	FG001
Housing Material	Diecasting aluminum Housing with opal diffuser
Housing Color	Black
IP	IP65
LED Life Span	30,000 hrs
Warranty	3 years
Operating Temperature	0C to +30C
Classification	Class 1
Power Supply	220VAC-240VAC 50/60 Hz


#### Include :

- 1 X E27 Holder
- 1 X Philips / Osram LED Bulb

CCTK	4000K
Initial Input Power	10W
Efficacy	85lm/w
Total Luminous Flux	850m

#### Dimension

Dimension: (Dia)200mm, (H) 350mm



Note: Specification are subject to change without prior notice



HI-BEAM™ Lighting

