




LED Inground Light IG46022L



DIMENSIONS

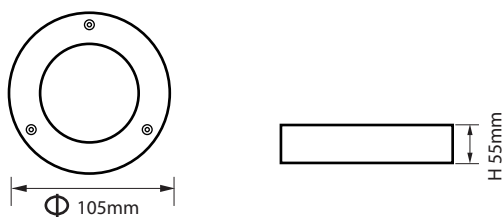


INTENDED USE

Hi-BEAM LED IG46022L Inground light comes with diffuser. Deliver excellent led performance for applications such as plazas, parks, playground, landscapes, gardens, villas, path side, steps, pillar etc.

CONSTRUCTION AND OPTICS

C/W aluminium die-casting body, 304 stainless steel ring.
C/W tempered glass diffuser with silicone rubber gasket.
Color temperature available in 3000-4000K. LED lifespan of 50,000 hours. Input voltage is AC210-280VAC, 50/60Hz.

LINE DRAWING



DIMENSION OF FITTING

Product Code	Model Code	Wattage	Color Temperature
IG46022L-5W	IG46022L	5W	3000-4000K
IG46022L-3W	IG46022L	3W	3000-4000K



LED INGROUND LIGHT RECESSED - 5W

Hi-BEAM LED IG46022L Inground light comes with diffuser. Deliver excellent led performance for applications such as plazas, parks, playground, landscapes, gardens, villas, path side, steps, pillar etc.




Product data

General Information

Product family code	IG46022L (IG46022L-5W)
Housing Material	Diecasting aluminum Housing with tempered glass diffuser with silicone sber gasket
Housing Ring Color	304 Stainless Steel
LED Light Source	Epistar
Ingress Protection	IP65/IK 07
Power	5w
LED Life Span	50,000hrs
Operating Temperature	-5C to +50C
Classification	Class 1
Power Supply	210VAC-280VAC 50/60 Hz
MacAdams	5
CCTK	3000-4000K
Initial Input Power	5w
Total Luminous Flux	625lm
Power Factor	>0. 95
CRI	>80


Photometric

120'



Dimension

Dimension: (Dia)105mm, (H) 55mm

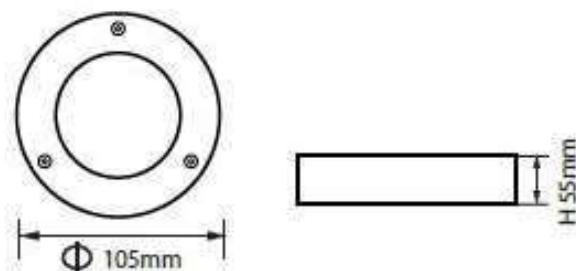



LED INGROUND LIGHT RECESSED - 3W

Hi-BEAM LED IG46022L Inground light comes with diffuser. Deliver excellent led performance for applications such as plazas, parks, playground, landscapes, gardens, villas, path side, steps, pillar etc.




Product data

General Information

Product family code	IG46022L (IG46022L-3W)
Housing Material	Diecasting aluminum Housing with tempered glass diffuser with silicone sber gasket
Housing Ring Color	304 Stainless Steel
LED Light Source	Epistar
Ingress Protection	IP65/IK 07
Power	3w
LED Life Span	50,000hrs
Operating Temperature	-5C to +50C
Classification	Class 1
Power Supply	210VAC-280VAC 50/60 Hz
MacAdams	5
CCTK	3000-4000K
Initial Input Power	3w
Total Luminous Flux	375lm
Power Factor	>0. 95
CRI	>80

Photometric

120'



Dimension

Dimension: (Dia)105mm, (H) 55mm

