




# Surface RDL SC-280C



## DIMENSIONS



## INTENDED USE

Hi-BEAM SC-280C Surface Round downlight comes with diffuser. Deliver excellent led performance for applications such as office, meeting room, classroom, house or hotel to replace conventional PLC downlight.


## CONSTRUCTION AND OPTICS

Powder coated metal housing with plastic diffuser come with diffuser.

Color temperature available in 4000K.

LED lifespan of 50,000 hours. AC210-280VAC, 50/60Hz.

## LINE DRAWING

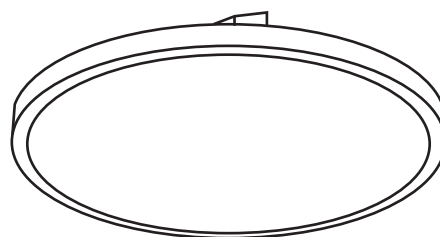

## DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature
SC-280C-8W	SC-280C-8W	8W	1000lm	4000K

\*\*Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.





## ROUND SURFACE SLIM DIFFUSER LED DOWNLIGHT - 8W

Hi-BEAM SC-280 LED round surface downlight deliver excellent led performance for applications such as meeting room, classroom, house interior or hotel to replace conventional PLC downlight.




### Product data

#### General Information


Product family code	SC-280C
Housing Material	Lamp body Metal, Diffuser PMMA
Housing Color	White / Silver
LED Light Source	Epistar
Color Temperature	4000K
CRI	> 80
IP	IP44/IK02
MacAdams	3
LED Life Span	50,000hrs
Operating Temperature	0C to +30C
Classification	Class 1
Power Supply	210VAC-280VAC 50/60 Hz
Initial Input Power	8W
Total Luminous Flux	1,000lm

#### Photometric



#### Dimension

Dimension: 260mm, (H) 60mm



Note: Specification are subject to change without prior notice



HI-BEAM™ Lighting

