




# SIENA 2 PRO-T14


## Recess Mount Downlight



### DIMENSIONS

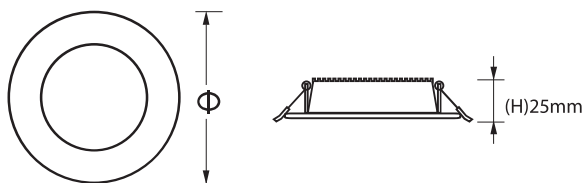

### LINE DRAWING

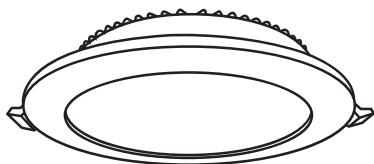

### INTENDED USE

The SIENA 2 Pro-T14 Recess downlight series can show high brightness, without seeing the lamp itself. Suitable for application such as household, exhibition hall, hotel, shops, jewellery store, hospital and meeting rooms.

### CONSTRUCTION AND OPTICS

Using high lumen SMD light source with aluminium housing and frosted opal diffuser. The thin profile design suitable for low ceiling clearance. LED lifespan of 50,000 hours. Input Voltage is 210-280VAC, 50/60Hz.

### DIMENSION OF FITTING

Product Code	Model Code	Wattage	Lumens	Color Temperature	Φ mm	mm
SIENA2PRO-T14-RR-11W	SIENA2-11	11W	1375lm	3000-4000K	150	135
SIENA2PRO-T14-RR-17W	SIENA2-17	17W	2250lm	3000-4000K	223	205
SIENA2PRO-T14-RR-25W	SIENA2-25	25W	3325lm	3000-4000K	223	205

\*\*Please refer to driver data sheet for the circuit looping details for the MCB / Circuit Breaker you use for your installation.

# PHILIPS

Specifications and dimension subject to change without notice  
[www.degindustrial.com](http://www.degindustrial.com)



HI-BEAM™ Lighting



# SIENA2 PRO- T14

## SIENA2 PRO T14- 25W

### LED ROUND RECESS DOWNLIGHT

Hi-BEAM SIENA 2 Pro T14 - 25W LED round recess downlight come with frosted diffuser. Deliver excellent led performance for applications such as office, meeting, classroom, house or hotel to replace conventional PLC downlight.



## Product data

### General Information


Product family code	SIENA2-25
Housing Material	Diecasting aluminum heatsink with diecasting aluminum frame and opal diffuser
Housing Color	White
LED Light Source	Epistar
Color Temperature	3000-4000K
CRI	> 80
Beam Angle	120deg
LED Life Span	50,000hrs
MacAdams	3

Power Factor	>0.95
Operating Temperature	0C to +35C
Classification	Class 1
Power Supply	210VAC-280VAC 50/60 Hz

Initial Input Power	25W
Total Luminous Flux	3,325lm
IP Rating	IP44 IK02

### Photometric

120'



### Dimension

Diameter	223 x (H)25MM,
Cutout	205mm

ROUND

