




LED Wall Recess Step Light WS48046

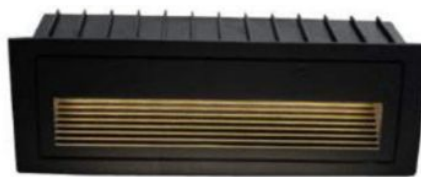

INTENDED USE

Hi-BEAM WS48046 LED wall recess step light deliver excellent led performance for applications such as building facade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions.


CONSTRUCTION AND OPTICS

Aluminium die-casting housing, stainless steel cover with tempered glass diffuser. LED lifespan of 50,000 hours. Input Voltage is 210V-280V - 50/60Hz.

LINE DRAWING



DIMENSIONS



DIMENSION OF FITTING

Product Code	Model Code	Wattage	Color Temperature	CRI
WS48046740	WS48046	5W	3000-4000K	75

LED WALL RECESS STEP LIGHT - WS48046

Hi-BEAM WS48046 LED wall recess step light deliver excellent led performance for applications such as building facade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions.




Product data

General Information

Product family code	WS48046
Housing Material	Aluminum die-casting housing, Stainless steel cover Tempered glass diffuser
Housing Color	Stainless steel cover
LED Light Source	Epistar
LED Life Span	50,000hrs
Ingress Protection	IP65/IK 07
CRI	>80
CCTK	3000-4000K
MacAdams	3
Operating Temperature	-5C to +50C
Power Supply	210-280VAC ~50/60 Hz
Initial Input Power	5W
Total Luminous Flux	625lm
Power Factor	>0. 95


Photometric

120°



Dimension

Dimension : L170 x W70 x H86mm



Note: Specification are subject to change without prior notice

www.degindustrial.com



HI-BEAM™ Lighting

