




# LED Wall Up Down Light WUD1001



## DIMENSIONS




## INTENDED USE

Hi-BEAM WUD1001 LED wall Up Down light deliver excellent led performance for applications such as building facade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions.

## CONSTRUCTION AND OPTICS

Aluminium die-casting housing grey color. Clear or frost PC diffuser. LED lifespan of 50,000 hours. Input Voltage is 210V-280V - 50/60Hz.

## LINE DRAWING



## DIMENSION OF FITTING

LED Wall Up Down Light

Product Code	Model Code	Wattage	Color Temperature	CRI
WUD1001B-2X25W-740	WUD1001-2X25W	2x25W	3000-4000K	80





# LED WALL UP DOWN LIGHT WUD1001

Hi-BEAM WUD1001 2 X 25W LED wall light deliver excellent led performance for applications such as building façade, passage ways, villa, hotels, house or corridors to replace conventional traditional PLC / CDMT solutions




## Product data

### General Information

Product family code	WUD1001-2x25W
Housing Material	Aluminum die-casting housing, clear/frost PC diffuser
Housing Color	GRAY
LED light source	EPISTAR
LED Life Span	50,000hour
Ingress Protection	IP65/IK 08
CRI	80
CCTK	3000-4000K
MacAdams	5
Operating Temperature	-5C to +50C
Power Supply	210-280VAC ~50/60 Hz
Initial Input Power	2X25W
Total Luminous Flux	3,250 lm
Power Factor	> 0.95


### Photometric

120'



### Dimension

Dimension : L215 x W145 x (H)450 mm

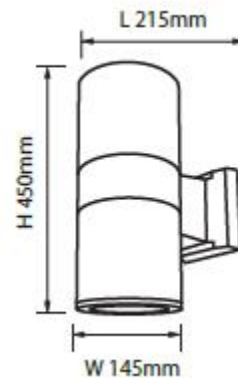

Note: Specification are subject to change without prior notice

[www.degindustrial.com](http://www.degindustrial.com)



HI-BEAM™ Lighting

